

ED-30 Incremental Linear Encoder

DESCRIPTION

The ED-30 series incremental linear position sensors are designed for demanding OEM applications requiring low-cost linear position feedback. The ED-30 series sensor provides resolutions from 0.08mm down to 0.02mm. Magnetic tapes are available from Measurement Specialties, upon request. Slew rates of up to five meters per second are possible without dropping counts.

Designed to operate in manufacturing environments, the sensor is unaffected by dust, dirt, oil and changing ambient light conditions. Magnetic tape may be purchased in any length, as determined by the application requirements.



FEATURES

- ◆ Sealed IP67
- ◆ Low Power
- ◆ Low Cost / OEM
- ◆ No Range Limit
- ◆ Easy Installation and Set Up
- ◆ Tolerates Hostile Environments Like dirt and Vibration

OPTIONS

- ◆ Aluminum or Plastic Housing
- ◆ Regulated Input
- ◆ Various Outputs (see spec. table)

APPLICATIONS


- ◆ Medical Pumps
- ◆ String Pot Replacement
- ◆ XY Tables
- ◆ Web Control
- ◆ Hydraulic Cylinder Position
- ◆ Table Saw Position

specifications

Operating Voltage:	5V+/-5%
	24V+/-20%
Output:	Open Collector with internal 10K pull-up
	TTL
	Differential Line Driver
Reference:	With or without periodic index
Resolution:	.02mm
	.04mm
	.08mm
Repeatability:	+/-1 increment
Power Consumption:	40mA max @24V unloaded
	Low power option 7mA typical @ 5V unloaded
Output current (per channel):	Open Collector: 34mA max sinking
	Push-Pull: 34 mA max source and sink
	Push-Pull low power option: 1mA max
	Line Driver: 800mA max (short circuit protected)
Output signals:	A,B, optional I
	A, /A, B, /B, optional I, /I
Air gap:	1mm typical
Travel speed:	5 m/s max.
Temperature range:	-40°.....+85°C operating
	-40°.....+125°C storage
Protection:	IP67
Housing:	Plastic or Aluminum

ED-30 Incremental Linear Encoder

dimensions

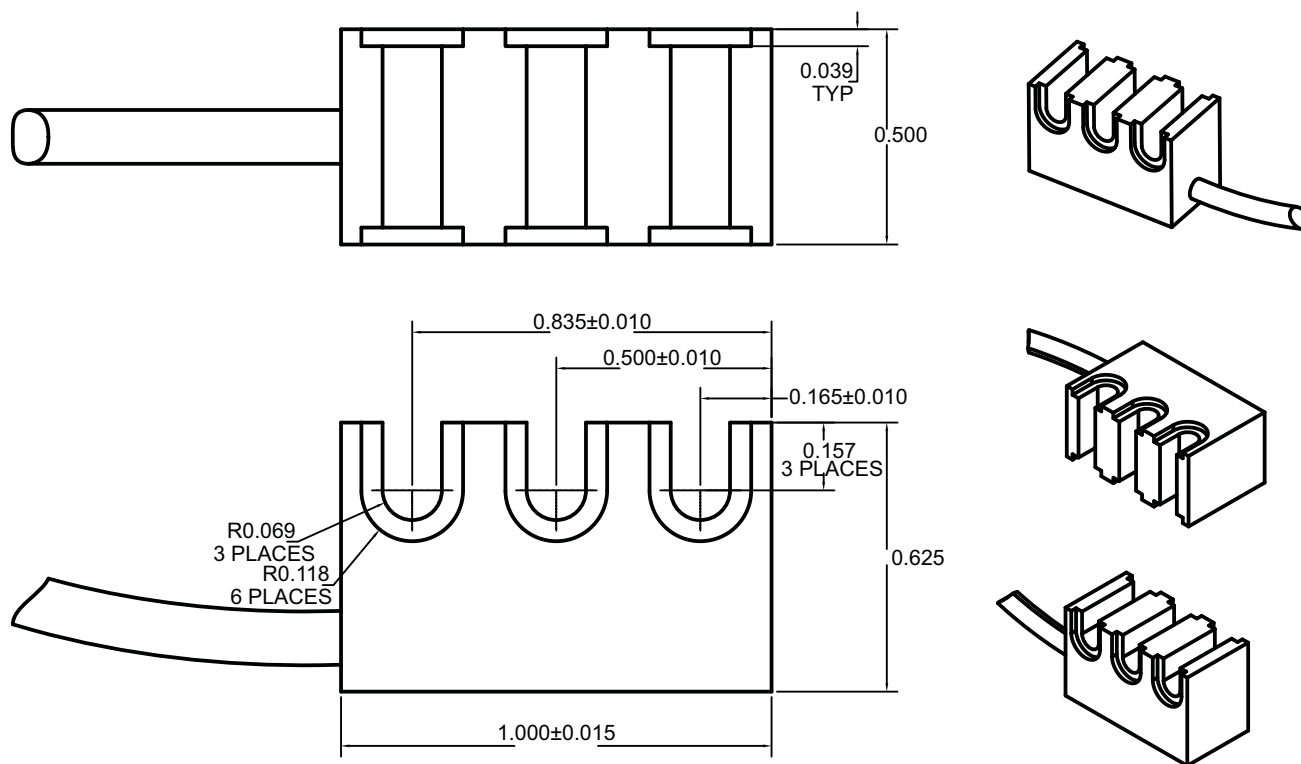

wiring

Red: +5 Vdc

Black: Common

White: Ch. A

Green: Ch. B