


S18 Square Plastic Housing - Inductive Sensor



- Features:
- Inductive sensor, style: Squared shape, Dim: 18x18x31mm DC 2 wire (10-30V DC), DC 3-wire (10-30V DC), type
- Mounting distance: 5mm shielded
 With LED operation indicate lamp, easily identifiable

- Standard sensing object: iferrous metals;
 Protection rate: IP67, water resistant
 Over-current and short circuit protection; Against polarity reversal.
 Widely applied in measuring, Counting, Rpm measuring in mechanism, chemical, paper manufacture, light industry, etc.

ORDERING CODE INFORMATION

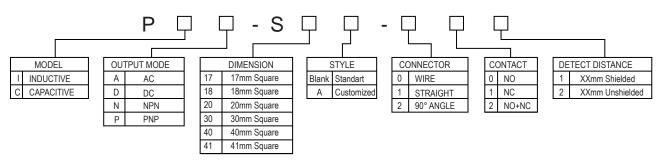



ORDERING CODES					
Model and Type	Output type	Mounting distance	Current output	Power supply	Connector model
PIN-S18-001	NPN NO	5mm, shielded	≤ 200mA	DC 10-30V	3 Wire
PIN-S18-011	NPN NC	5mm, shielded	≤ 200mA	DC 10-30V	3 Wire
PIP-S18-001	PNP NO	5mm, shielded	≤ 200mA	DC 10-30V	3 Wire
PIP-S18-011	PNP NC	5mm, shielded	≤ 200mA	DC 10-30V	3 Wire
PID-S18-001	DC NO	5mm, shielded	≤ 200mA	DC 10-30V	2 Wire
PID-S18-011	DC NC	5mm, shieldeD	≤ 200mA	DC 10-30V	2 Wire


TECHNICAL SPECIFICATIONS


Property project	Specific parameter
Mounting distance	shielded: 5mm
Sensing distance	0~4.5mm
Power supply	DC 10-30V
Frequency	DC: ≤ 200-400Hz
Current output	DC: ≤ 200mA
Ambient temperture	-20°C-70°C
Protection	Over-current, short circuit, polarity reversal protection
IP rating	IP67

ELECTRICAL CONNECTION DRAWING









S18 Square Plastic Housing. All dimensions in millimeters (mm) nominal.

INDUCTIVE PROXIMITY APPLICATION DIRECTIONS

a. Set mounting distance equal to 80% of Sn.
b. Set mounting distance roughly equal to 50% of Sn when sensor is used measuring mounting frequency or operating in high speed circumstances.
c. Mounting distance will change depending on material (iron, stainless steel, brass, copper and aluminum).

