

SRT Resistor Technology

Standard Chip Resistors

Type: CRS

Sizes: 0504, 0603, 0805, 1206


Features:

- Chip Resistors in thick film technology
- Resistance element glass-passivated
- Contact areas Nickel-barrier / matte tin
- RF-versions untrimmed
- Resistance values up to 500 M Ω
- Working voltage up to 600 Volts
- Suitable for high vacuum applications – no organics



Dimensions:

Size	L	B	D	C
0504	1.25 ^{+0.15/-0.05}	1.0 ^{+0.15/-0.05}	0.3 ^{+0.15/-0.05}	0.2 ^{+0.2/-0.1}
0603	1.5 ^{+0.15/-0.05}	0.8 ^{+0.15/-0.05}	0.4 ^{+0.15/-0.05}	0.2 ^{+0.2/-0.1}
0805	2.0 ^{+0.15/-0.05}	1.25 ^{+0.15/-0.05}	0.4 ^{+0.15/-0.05}	0.3 ^{+0.2/-0.1}
1206	3.2 ^{+0.15/-0.05}	1.5 ^{+0.2/-0.05}	0.4 ^{+0.15/-0.05}	0.3 ^{+0.2/-0.1}

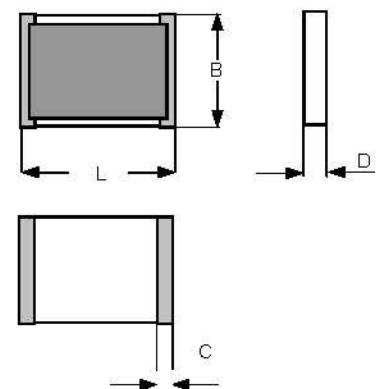

L = Length, B = Width, D = Thickness, C = Width of wrap around (in mm)
Larger sizes on request

Packaging:

Bulk in plastic bags – minimum quantity 100 pieces per value
Blister tape acc. to EN 60286-3 – minimum 1000 pieces per value
Reel diameter 180 mm or 330 mm

Ordering Data:

Type – value – tolerance – TCR – packaging

Example: CRS 0805 100K \pm 1% - TCR 100 Tape 180 mm

Untrimmed parts are indicated by the extension "NA" in the order code:

Type – value – tolerance – NA – TCR - packaging

Example: CRS 0805 100K \pm 10% NA TCR 100 Tape 180 mm

If no requirements for TCR and taping are given the standard value (highest value in table) will be supplied and packaging is bulk.

Standard Chip Resistors

Type: CRS

Sizes: 0504, 0603, 0805, 1206

Technical data – depending on size:

Size	0504	0603	0805	1206
Power rating P_{70} (mW) ($P_{155} = 0$ mW)	100	100	125	250
Working voltage U_{-} , U_{eff} (V) trimmed untrimmed (Tol. $\geq 5\%$)	50 150	75 200	100 300	200 600

Ranges / Tolerances / TCR ¹⁾				
0R1 – <1R	–	10/20% TC250	5/10/20% TC250	5/10/20% TC250
1R – <10R	5/10/20% TC100/250	5/10/20% TC100/250	2/5/10/20% TC100/250	2/5/10/20% TC100/250
10R – <100R	2/5/10% TC100	1/2/5/10% TC100	1/2/5/10% TC50/100	1/2/5/10% TC50/100
100R – 1M	1/2/5/10% TC50/100	1/2/5/10% TC50/100	0.5/.../10% TC50/100	0.5/.../10% TC50/100
>1M – 10M	1/2/5/10% TC50/100	1/2/5/10% TC50/100	0.5/.../10% TC50/100	0.5/.../10% TC50/100
>10M – 100M	2/5/10/20% TC100/250	1/.../20% TC50/100	0.5/.../20% TC50/100	0.5/.../20% TC50/100
>100M – 500M	–	5/.../20% TC100/250	2/.../20% TC100/250	2/.../20% TC100/250

¹⁾ TC 50: Temperature range + 25°C...+ 125°C

Zero-Ohm-Jumper: < 50 mOhm

Sizes 0805/1206: TCR 25 is available as special product (range 1M – 100M only)

Technical data – general:

Temperature range	-55°C ... +155°C
Climatic category acc. to EN 60068-1	55/155/56
Solderability acc EN 60068-2-58 (lead free and lead-containing)	250°C, 3s
Max. soldering temperature acc. EN 60068-2-58	260°C, 10s

Long term stability	10R – 100M	< 10R / > 100M
Storage 125°C/1000h	< 0.5%	< 1%
Storage 155°C/1000h	< 1%	< 2%
Load P_{70} /70°C/1000h	< 0.5%	< 1%
Short term overload	< 0.25%	< 0.5%
Damp heat (56d/40°C/96%)	< 0.5%	< 1%

Data not specified according EN 140401-802 (CECC 40401-802)