


Series BF (Open) 30 Amps

Durakool 30 Amp general purpose contactors are available in 1, 2, and 3 pole configurations to suit a variety of design needs.

The BF (normally open) and BB (normally closed) both feature long-life contacts which provide low, stable contact resistance. Screw terminals are included for both load and control connections. The top wiring style of the load terminals allows efficient use of available panel space.

SPECIFICATIONS

- Maximum Time: Operate Release
- Normally Open: 70 ms 90 ms
- Normally Closed: 150 ms 200 ms
- Contact Bounce, Release: None
- Recommended DC Load Polarity: Center Tube Connector Negative
- Load Connectors: #8-32 Wire Binding Screw, Max. #8 AWG Cu.
- Coil Terminals: #6-32 Wire Binding Screw, Max. #12 AWG Cu.
- Breakdown Voltage: 5000 VRMS/Min. Across Contacts

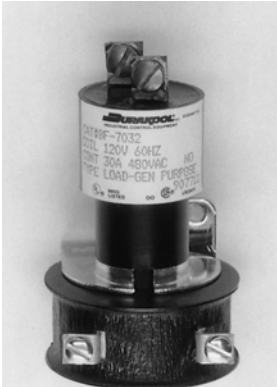

TYPE/SERIES		BF (Normally Open)			
DESCRIPTION	Volts	Part Number	Typical Coil Data		
			DC Ohms	Watts	Amps
1 Pole	24	BF-7031	40	2.80	0.233
	120	BF-7032	902	3.69	0.057
	208	BF-7033	3100	3.46	0.030
	240	BF-7034	3700	3.14	0.025
	277	BF-7035	5410	3.42	0.022
	480	BF-7036	15000	3.49	0.013
	12 (DC)	BF-7058	57	2.50	0.210
	24 (DC)	BF-7046	230	2.50	0.104

ELECTRICAL RATINGS	GENERAL PURPOSE 0.7/0.8 UL Power Factor						DC			Tungsten Lamp/60 Hz		AC MOTOR LOAD			
	Volts	120	208	240	277	480	600	1-48	120	240	120	Amps	KW	1 Phase	
SERIES	60 Hz Amps						DC Amps			Amps	KW	Hp	Hp	Hp	
BF 30 (Normally Open)	30	30	30	30	30	30	30	25	15	30	3.6	2.0	3.0	5.0	
BB 30 (Normally Closed)	30	22	20	18	10	8	30	20	10	20	2.4	1.5	2.0	3.0	

DURAKOOL Series BF (Open) 30 Amps

