





## SM3724-4 7.5 Watt Wire Wound 4-Terminal Resistor

# SM3724-4



### Electrical & Physical Specifications:

<b>A-Length:</b>	45.72mm (1.800")
<b>B-Diameter:</b>	11.10mm (.437")
<b>Lead Dimensions:</b>	.032" dia. X 1.400" long (min.)
<b>Min Res. @ Max Power:</b>	.03Ω @ 7.5W
<b>Min Res. @ Derated Power:</b>	.001Ω @ .22W
<b>Temperature Range:</b>	-55°C to +275°C

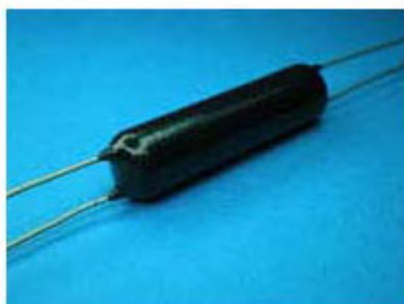

### SM-4 Series Engineering Attributes:

#### RESISTANCE & TOLERANCE

**Standard:** Any Ohmic value or decimal part of an Ohm desired from .015Ω to 100Ω with tolerances to ±.005%

**Special:** From .001Ω to .015Ω with tolerances to ±.1%  
Refer to Fig. 6 for min. resistance vs. tolerance ratios.

#### TCR CHARACTERISTICS

**Standard:** 0±15 PPM/°C.

**Special:** 0±10 PPM/°C.

Please specify temperature span of operation.

#### STABILITY VS. TIME

To ±.001%/year @ +25°C. (No Load)

#### PROTECTIVE COATING SEAL

Solvent resistant coat with indelible marking

#### POWER RATING

The standard minimum resistance at full power is based upon ±1% resistance tolerance @ +25°C. Derating is required for lower values, closer tolerances, and higher temperatures. Please refer to the Derating Table shown here & Fig. 5 below.

#### \*Type SM-4 Derating Table:

For ±1% Res. tol. apply up to 100% of rated power at +25°C. derated to zero at +275°C.
For ±0.5% Res. tol. apply up to 80% of rated power at +25°C. derated to zero at +225°C.
For ±0.25% Res. tol. apply up to 60% of rated power at +25°C. derated to zero at +175°C.
For ±0.1% Res. tol. apply up to 40% of rated power at +25°C. derated to zero at +125°C.
For ±0.05% Res. tol. apply up to 20% of rated power at +25°C. derated to zero at +75°C.

\* Percent of Rated Power vs. Combined Temp. of Self-Heating and Ambient in Degrees Celsius.


## TWO (2) TERMINAL VS. FOUR (4) TERMINAL (Kelvin)

Two terminal resistors are generally used for high Ohmic values, where the effects of lead-out resistance and contact resistance are minimal. Allow approximately  $\pm 0.001\%$  of an Ohm per inch, for the lead-out resistance on two terminal designs. However, on low values where lead resistance can be a part of a very accurate measurement, the adder may be eliminated by using a 4-terminal device, because 4 terminal circuits will only be indicate the voltage drop across the resistor.


### FOUR TERMINALS

PRC's type SM-4 has four solderable hot-tinned copper leads. Lead identification is academic because of its single joint construction. To observe uniformity, while observing the PRC marking on the body of the resistor, select the 2 leads closest to the top for sense leads & use the remaining two for current leads.

## Detailed Images

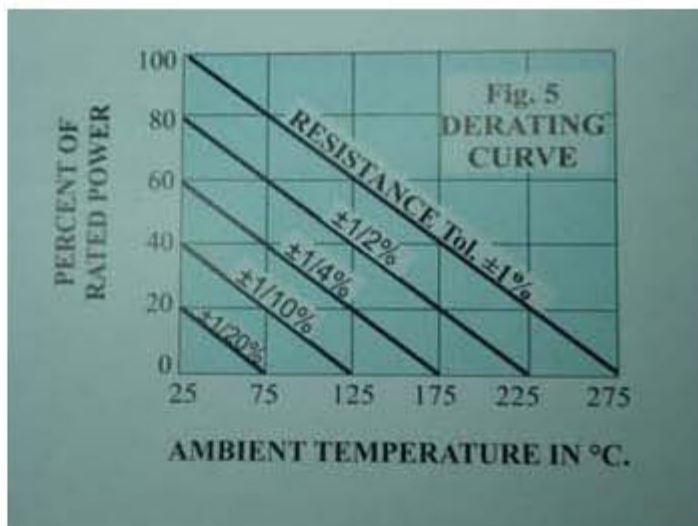

### Derating Information

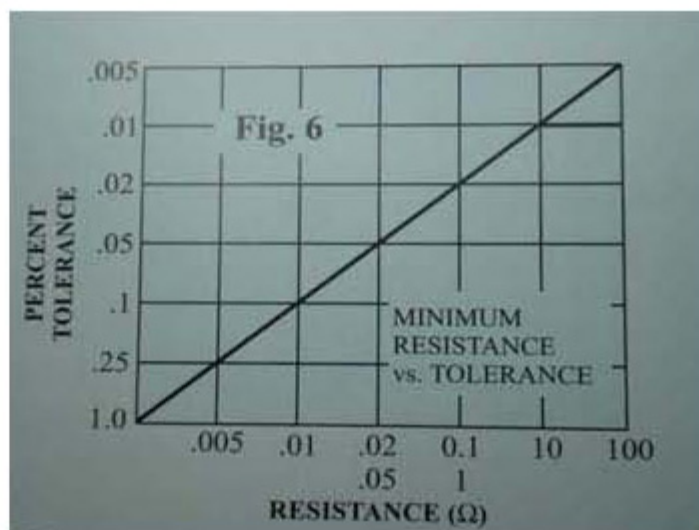

### Minimum Resistance vs. Tolerance

#### Details

SKU	SM3724-4
Type	4-Terminal Axial
Length	45.72mm (1.800")
Lead Dimensions	.032" dia. X 1.400" long (min.)
Diameter	11.10mm (.437")
TCR Char.	0±15ppm/°C (between +25°C. and +100°C.)
Temperature	-65°C. to +275°C.
Resistance	.001Ω to 100Ω
Tolerance	to ±.005%
Max Amps	15
Stability	to ±.001% per year at +25°C
Max Watts	7.5
Amps	15
Special Resistance	.001Ω @ .22W to .03Ω @ 7.5W
Lead Free	Yes