

HCD Series Hermetically Sealed



The HCD Series LVDTs are impervious to dirt, water, steam spray and most corrosives. Tungsten inert gas (TIG) welding provides hermetic sealing that is free from oxidation-producing faults that may cause leakage. They have been qualified at pressures up to 1000 psi (70 bars) and are suitable for numerous high-pressure applications. They are terminated with a glass-sealed, MS-type terminal connector. The connector prohibits the core from passing completely through the coil assembly. HCD units have double magnetic shielding that makes them insensitive to external magnetic influences.



FEATURES

- Hermetically Sealed by TIG
- CE Compliant
- Glass-Sealed MS.Type Connector
- Calibration Certificate supplied with all models


APPLICATIONS

- Harsh Industrial Environments
- Ideal for Pressure Installations up to 1,000 psi
- Submersible with Appropriate Connector

OPTIONS

- Metric Thread Core
- Captive Core Option for Convenient Installation
- Guided Core
- Small Diameter, Low Mass Core

wiring

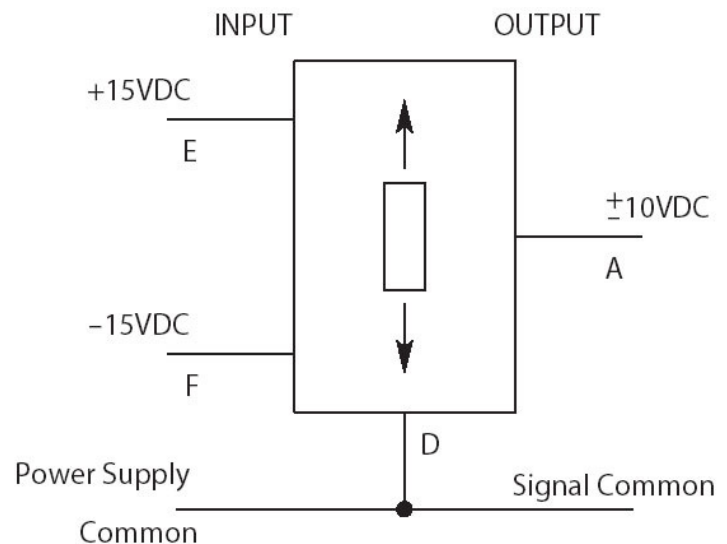

HCD Series Hermetically Sealed

Specifications

Input Voltage	± 15 VDC (nominal), ±25 ma
Operating Temperature Range	32°F to 160°F (0°C to 70°C)
Survival Temperature Range	-65°F to 200°F (-55°C to 95°C)
Null Voltage	0 VDC
Ripple	Less than 25 mV rms
Linearity	0.25% full range
Stability	0.125% full scale
Temperature – Coefficient of Scale Factor	0.04%/°F (0.08 %/°C)
Shock Survival	250 g for 11 milliseconds half sine
Vibration Tolerance	10 g up to 2 kHz
Coil Form Material	High Density, Glass-Filled Polymer
Housing Material	AISI 400 Series Stainless Steel
Electrical Termination	6-pin Connector
Output Impedance	Less than 1 ohm

Electrical

Performance and Electrical Specifications¹

HCD Series Model Number	Nominal Linear Range		Scale Factor		Response (-3 dB)
	Inches	mm	V/inch	V/mm	Hz
050 HCD	±0.050	±1.25	200.0	8.00	500
125 HCD	±0.125	±3.0	80.0	3.00	500
250 HCD	±0.250	±6.0	10.0	1.60	500
500 HCD	±0.500	±12.5	20.0	0.80	200
1000 HCD	±1.000	±25	10.0	0.40	200
2000 HCD	±2.000	±50	5.0	0.20	200
3000 HCD	±3.000	±75	3.3	0.13	200
5000 HCD	±5.000	±125	2.0	0.08	200
10000 HCD	±10.000	±250	1.0	0.04	200

¹All calibration is performed at room ambient temperature.

Mechanical

Mechanical Specifications

HCD Series Model Number	Weight				Dimensions							
	Body		Core		A (Body)		B (Core)		C		P	
	Oz	gm	Oz	gm	In	mm	In	mm	In	mm	In	mm
050 HCD	1.41	40	0.07	2	2.40	61.0	0.75	19.1	1.90	48.3	0.55	14.0
125 HCD	1.77	50	0.11	3	3.23	82.0	1.25	31.8	2.73	69.3	0.96	24.5
250 HCD	2.19	62	0.18	5	4.10	104.1	2.00	50.8	3.60	91.4	1.39	35.3
500 HCD	2.93	82	0.28	8	5.79	147.1	3.00	96.2	5.29	134.4	2.23	56.5
1000 HCD	4.24	120	0.35	10	8.05	204.5	3.80	96.5	7.55	191.8	3.32	84.3
2000 HCD	6.09	174	0.53	15	11.42	290.1	5.30	127.0	10.92	277.4	5.05	128.3
3000 HCD	8.33	236	0.64	18	16.62	422.1	6.20	157.5	16.10	408.9	7.59	192.8
5000 HCD	10.38	294	0.64	18	20.45	519.5	6.20	157.5	19.95	506.7	9.56	242.8
10000 HCD	18.57	526	0.85	24	34.57	878.1	12.00	304.8	34.03	864.4	16.61	421.9


HCD Series Hermetically Sealed

new captive core option

The HCD features a captive core design that greatly simplifies installation. The design utilizes a core rod and bearing assembly that is captured and guided within the LVDT providing low friction travel throughout the stroke length. The assembly incorporates two Delrin bearings on the core rod traveling through the stainless steel boreliner. A bronze bearing on the front end utilizes a self-aligning feature to accommodate lateral LVDT movement during operation, the core rod and bearing assembly is field replaceable.




Connection Configurations for HCA, HCD and HCT Series

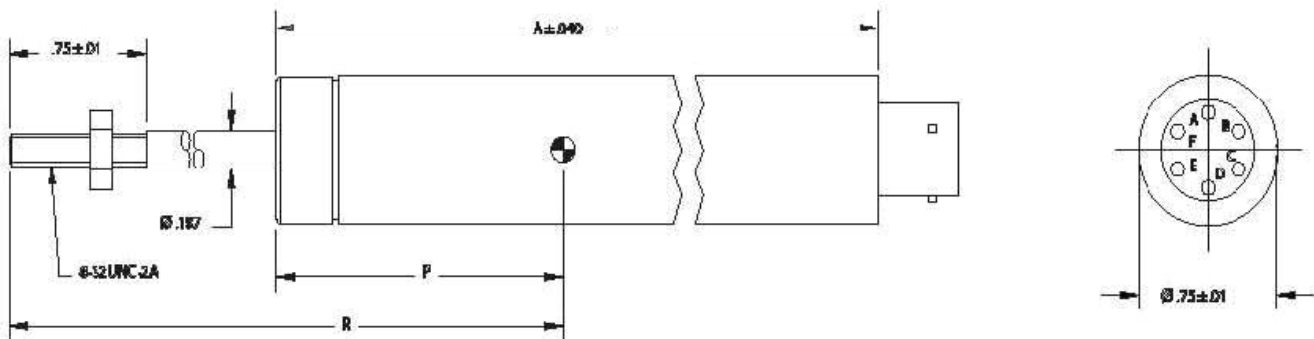

HCD Series Hermetically Sealed

dimensions

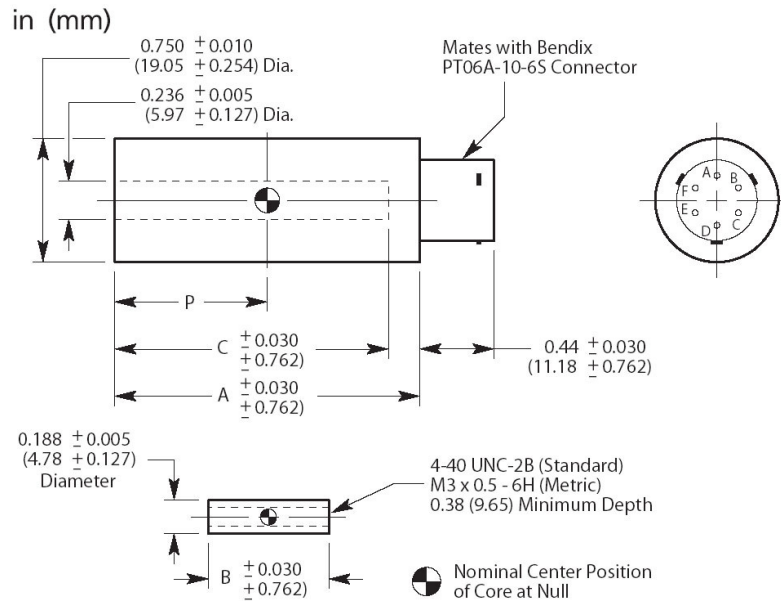

HCD Series Mechanical Specifications

HCD Series Model Number	Linear Range		Weight Assembly		Dimensions					
	In	mm	oz	gm	A		P		R	
					In	Mm	In	Mm	In	Mm
050 HCD	±0.050	±1.25	2.19	62	2.74	69.6	.89	22.8	3.78	96.0
125 HCD	±0.125	±3.0	2.65	75	3.57	90.7	1.30	33.0	4.36	110.7
250 HCD	±0.250	±6.0	3.14	89	4.44	112.8	1.73	43.9	4.85	123.2
500 HCD	±0.500	±12.5	4.06	115	6.13	155.7	2.57	65.3	6.04	153.4
1000 HCD	±1.000	±25	5.61	159	8.39	213.1	3.66	89.4	7.90	200.7
2000 HCD	±2.000	±50	7.87	223	11.76	298.7	5.39	113.4	10.52	267.2
3000 HCD	±3.000	±75	10.63	3.01	12.96	430.8	7.93	201.4	15.27	387.9

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.

ordering information

Specify the HCD Model followed by the desired option number(s) ordered together.

Ordering Example:

Model Number 050 HCD-026 is an HCD Series LVDT with a ±0.050" range (050 HCD), with a Metric Thread core (006) and a small diameter core (020).

HCD model

050 HCD
125 HCD
250 HCD
500 HCD
1000 HCD
2000 HCD
3000 HCD
5000 HCD
1000 HCD

options

Number	Description
006	Metric Thread Core
010	Guided Core
020	Small Diameter, Low Mass Core ¹
200	Captive Core ²

¹ Consult factory for mass, dimensions and thread size.
² Available on 050 HCD through 3000 HCD models only.