

LOOP POWER INDICATOR

NEW

Product Feature

- Current Loop Powered, no Extra Power necessary
- A Universal Display Unit For all 4-20 mA Transmission circuits
- Works with Standard DIN 43650 Plug
- 4 Digit LCD Display, Free Scaling of Display Value
- 3-keys operation
- 4~20, 10~50mA Ranges

Product Specification

Power Input: 4~20mA, 10~50mA (Loop powered)

Voltage drop: <2.55V (20mA)
<2.65V (50mA)

Display: 4-digit LCD (9999 ~ -1999)

Control Interface: 3 keys

Accuracy: 0.1% F.S. ±1digit (25°C)

Error Message: Hi: over range
Lo: under range

Temperature coefficient: 50ppm F.S. / °C


Operation temperature: 0~60°C

Ambient temperature: 0~60°C


Storage temperature: -20~70°C

Protection: IP65

Product Dimension

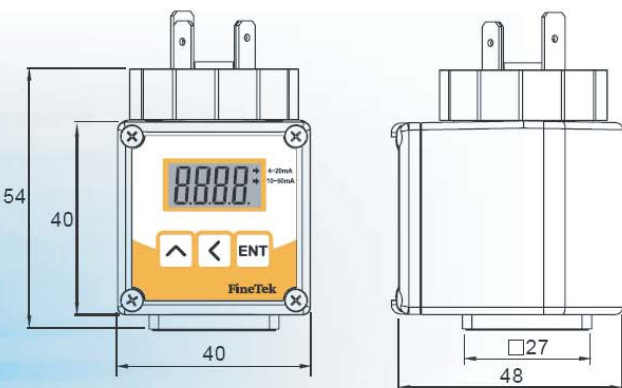


- ① Indicator for input range.
- ② "ENT" key: confirmation.
- ③ "<" key: position shift.
- ④ "▲" key: increment and mode change.



LR-10 1 4

A: Connection Type
1: DIN 43650

B: LCD Direction

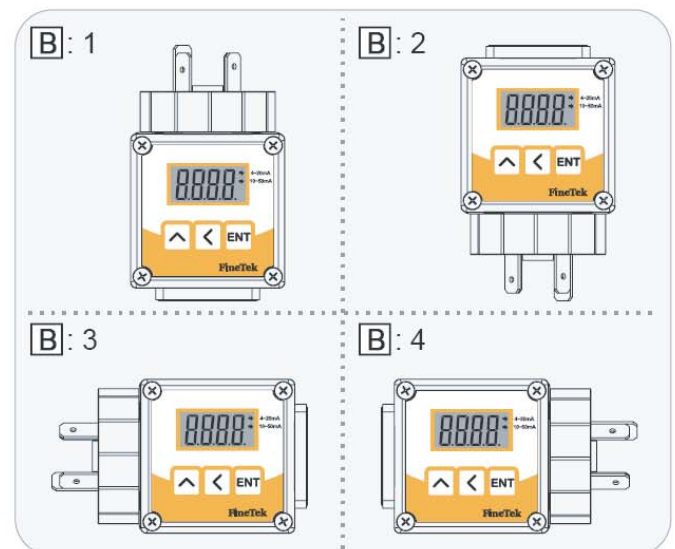

JIN ZON ENTERPRISE CO., LTD.

4F-3, No. 171, Sec. 2, Chang An E. Rd., Taipei, Taiwan, R. O. C.

TEL: 886-2-27111093~5 FAX: 886-2-27310902

E-mail: jinzon@ms2.hinet.net Http:// www.jinzon.com.tw/