

Photo:



Standard type of this sensor:


J40T/R-12W	White mesh with aluminum case
J40T/R-12B	Black mesh with aluminum case

Specification:


PARTS NUMBER	J40T-12	J40R-12
Center frequency (kHz)	40.0±1.0kHz	40.0±1.0kHz
Sound pressure level (0dB=0.0002μbar)	≥ 115dB	-----
Sensitivity (0dB vs 1V/μbar)	-----	≥ -67dB
Bandwidth (kHz)	4.0/105dB	2.0/-73dB
Beam angle -6dB	60°	
Driving voltage (RMS)	30V	
Working temperature(°C)	-30~80	

Dimension(J40T/R-12B)


- A=12.7±0.2
- B=9.4±0.4
- C=6.2±0.8
- D=8.5±0.2
- E=0.7±0.1
- (UNIT: mm)

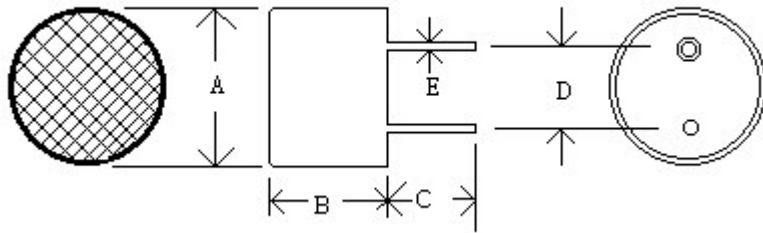


Sound Pressure Level

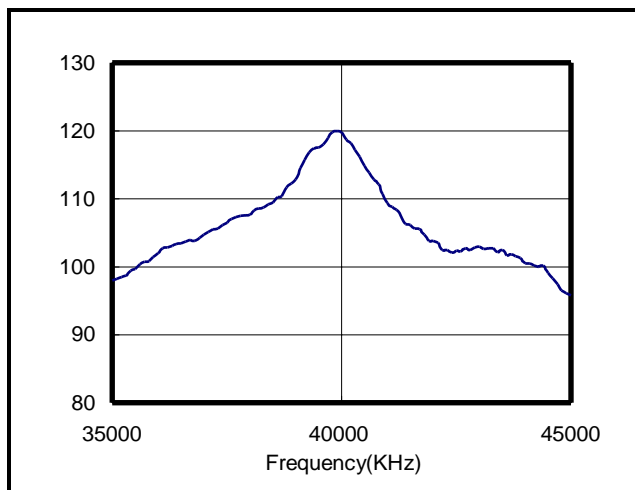


Sensitivity

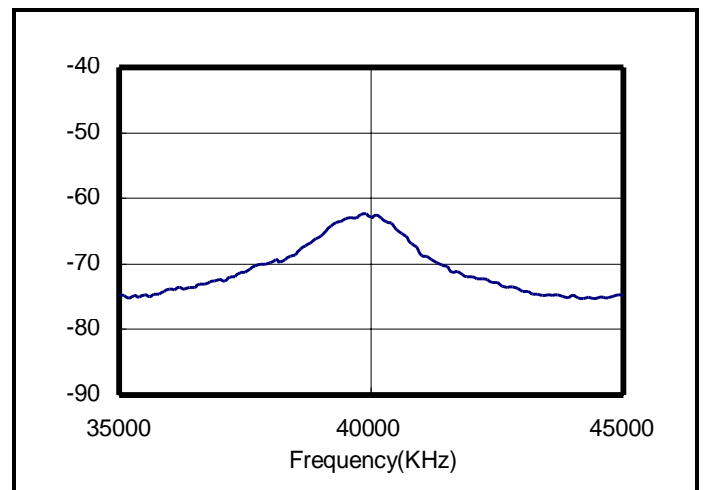


Transmitter impedance

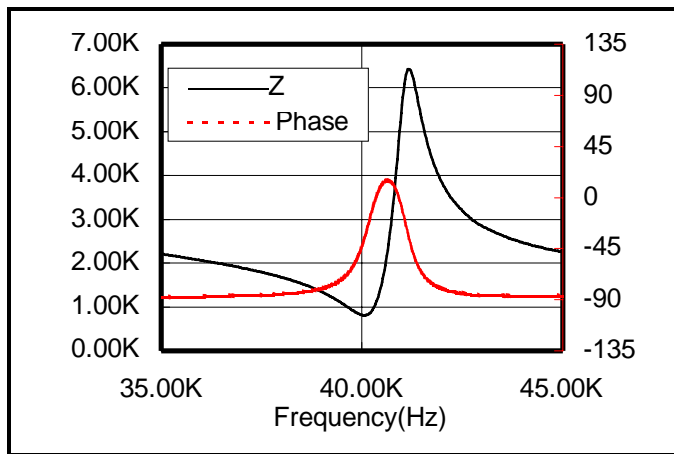


Receiver impedance

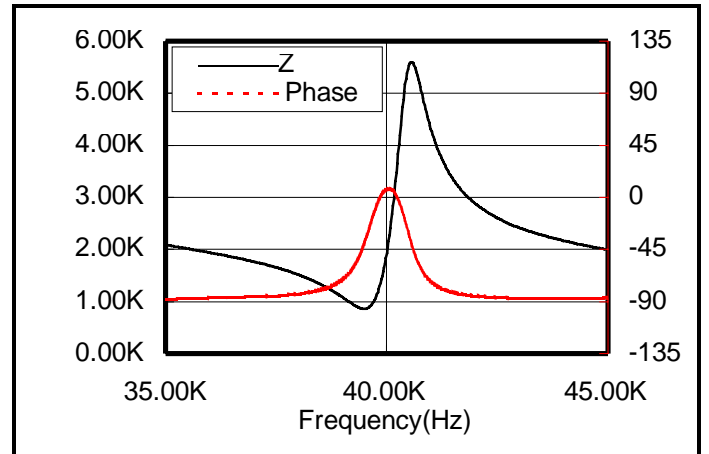


Beam angle of transmitter

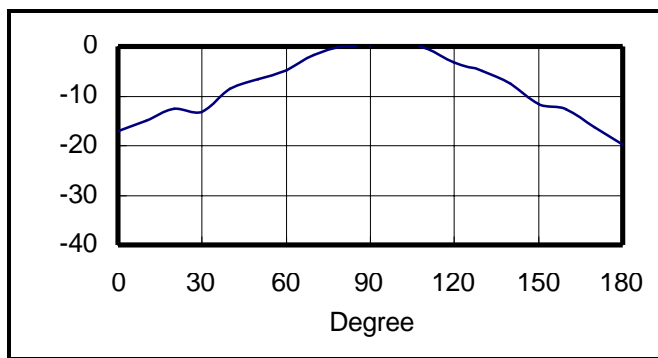


Beam angle of receiver

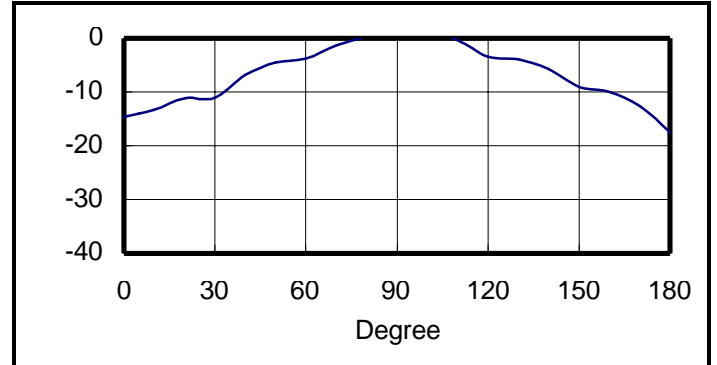


Environment test

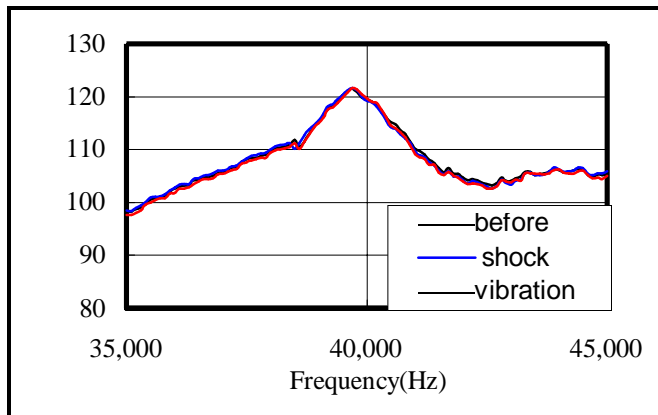

Temperature test

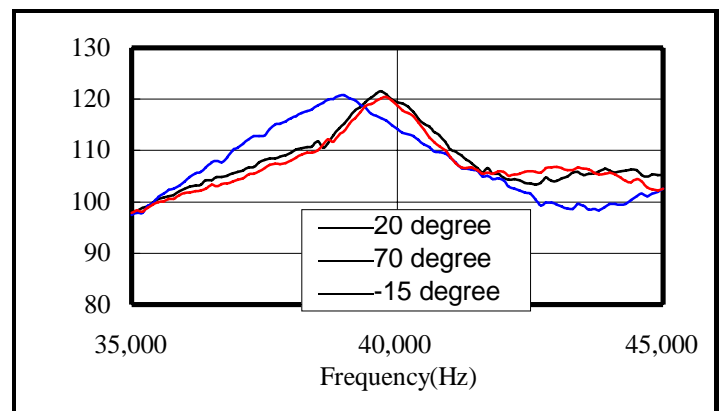

Sensitivity change with load resistance

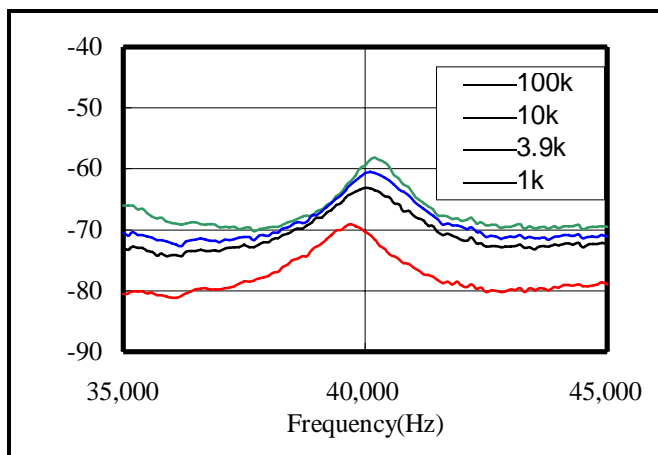

S.P.L. change with driving voltage

