


PCB Series DC SOLID STATE RELAYS

60V • 200V DC LINE/1-3A
DC CONTROL VOLTAGE

FEATURES:


- All solid state.
- 2500Vrms photo isolation.
- Low input power consumption, TTL • CMOS compatible.
- Input reverse polarity protection.
- Turn-on time below 100µs
- Standard package and pin-out.

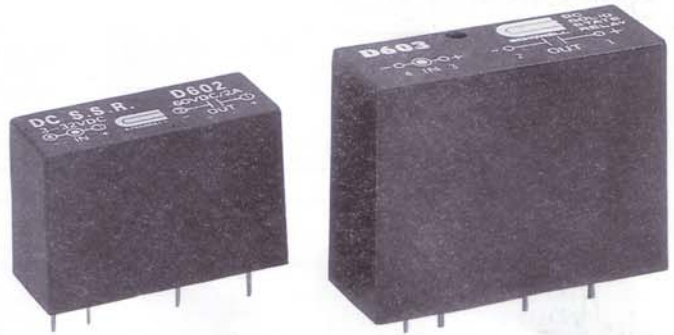


S TYPE

M TYPE

DIMENSIONS: (mm)/inch

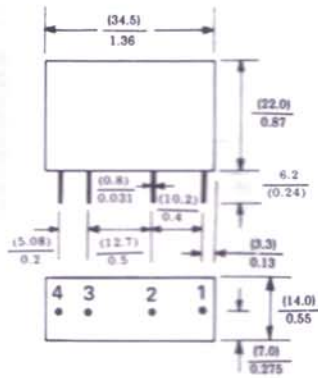


S TYPE PACKAGE

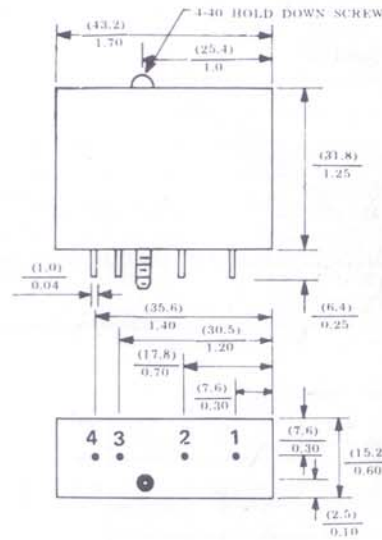

M TYPE PACKAGE

EQUIVALENT CIRCUIT DIAGRAM:

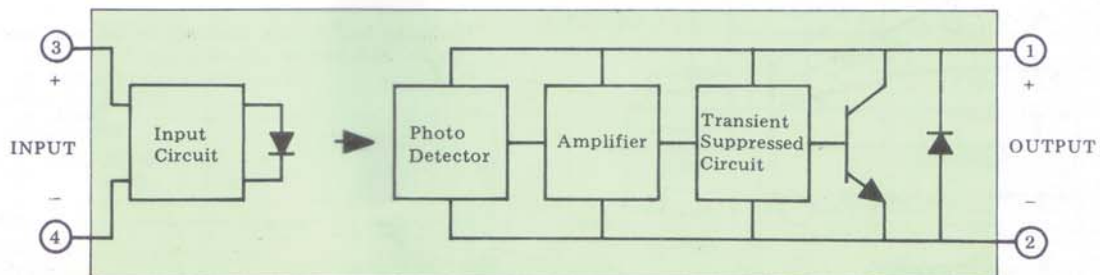

MODELS EXPLANATION:

