


**Proximity Switch - Reed Switch based - Rectangular - Normally Closed Contacts**  
**Part Number : PSB 130/30 Suggested Magnet: PSM (Black)**  
**Product Data Sheet**


## PICTURE



## DIMENSIONS



Drawings not to scale  
 All dimensions in mm nominal

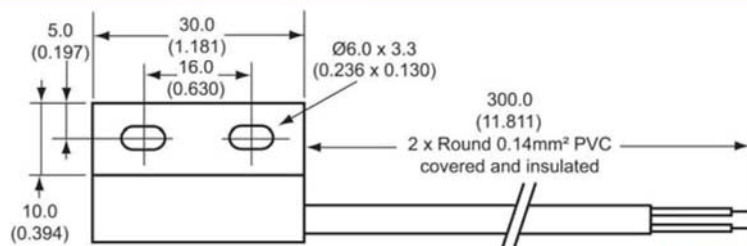

✓ RoHS Compliant

## SPECIFICATION

Contact Form / Style	Normally Closed
Switching Voltage	100 Vac
Switching Current	0.5 A
Switching Capacity (Resistive)	5 VA
Switching Distance	8.0 mm Minimum
Operating Temperature - Continuous	-20°C +85°C
Operating Temperature - Intermittent	-25°C +85°C
Storage temperature	-25°C +90°C
Case Material	Nylon 66
Cable	2 x 0.14mm² PVC Covered

### Applications Include

- Position and limit sensing.
- Linear actuators.
- Security system switch.
- Door Switch.

### Options

- Colour: Standard = Black housing / Black wire. Also available Blue housing / Grey wire.
- Cable Entry: Standard = Right hand entry (shown above). Also available Left hand entry.
- Custom cable lengths, strip lengths, cable types, terminations.
- If you do not see what you need, just ask, as there is a strong possibility we can do it !

### Did you know we also sell?



Rev. No.

Revision Note

Date

Signature

3

Mounting plate thickness dimension corrected

24-12-09

NG



## 駿融企業有限公司

地址：台北市長安東路二段171號4樓之3  
 電話：(02)27111093-5 傳真：(02)27310902, 27764624  
 Email: jinzon@ms2.hinet.net