




SENSOR SWITCH

Item.#	VBS04 Series	Description	VIBRATION SWITCH	Version	V97.0
Page	1 of 7		Date	Sep. 30, 2008	

● APPLICATIONS

1. Omni-directional vibration detecting: Earthquake Detecting System, Bicycle Alarms, Car Alarms, an Home Security Systems, Toys, Sporting Shoes etc

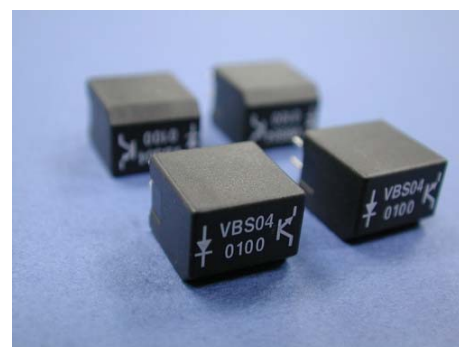

● FEATURES

1. Small size & compact space.
2. Housing made of high insulation plastic material, free from electric conduction and rust problem.
3. Using photo transistors to detect signal makes the signal highly reliable and stable.
4. All plastic material subject to industrial purpose meets with UL94V-0 grade; high temperature and fireproof function.
5. Suitable to IC trigger signal
6. Complete replacement of mercury switch and meet with environmental protection.

● PATENTS

1. TAIWAN Patent NO. I 226467
2. U.S.A. Patent NO. US 6,740,867 B2
3. CHINA Patent NO. ZL 02 1 46662.9



SENSOR SWITCH

Item.#	VBS04 Series	Description	VIBRATION SWITCH	Version	V97.0
Page	2 of 7		Date	Sep. 30, 2008	


● DIMENSIONS / OPERATION / P.C.B. LAYOUT (Unit: mm, Tolerance: ±0.25mm)

VBS 04 01 00	Activate When Being Vibrated From Any Position	P.C.B. Layout (DIP)/Top View

● Device Selection Guide

Input Current (mA)	Operating Voltage (V)
10	5

Application Circuit

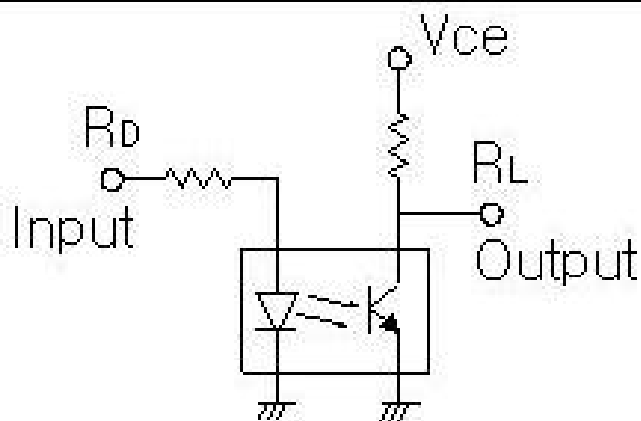

1. Vce=5V
2. RD=430ohn
3. RL=33Kohn



SENSOR SWITCH

Item.#	VBS04 Series	Description	VIBRATION SWITCH	Version	V97.0
Page	3 of 7		Date	Sep. 30, 2008	

● Absolute Maximum Rating (Ta=25°C)

Item		Symbol	Rating	Unit
Input	Power Dissipation	Pd	75	mW
	Reverse Voltage	Vr	5	V
	Forward Current	I _F	50	mA
	Peak Forward Current (*1)	I _{FP}	1	A
Output	Collector Power Dissipation	Pc	100	mW
	Collector Current	Ic	20	mA
	C-E Voltage	V _{CEO}	30	V
	E-C Voltage	V _{ECO}	5	V
Operating Temperature		Topr	-25~+85	°C
Storage Temperature		Tstg	-40~+100	°C
Soldering Temperature (*2)		Tsol	260	°C

(*1) tw=100 uSec. ∙ T=10 mSec.

(*2) t=5 Sec

● MECHANICAL CHARACTERISTICS

1.	Temperature Range	Operating: -25°C to +85°C Storage: -40°C to +85°C
2.	Pull Force of Terminal	500 gf for 1 minute
3.	Operation Life	30,000 Hours
4.	Humidity	95% RH, 40° C for 96 hrs.
5.	Solder ability	After flux 260±5°C for 5±0.5 seconds 95% coverage



SENSOR SWITCH

Item.#	VBS04 Series	Description	VIBRATION SWITCH	Version	V97.0
Page	4 of 7		Date	Sep. 30, 2008	

● Electrical Optical Characteristics (Ta=25°C)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Forward Voltage	V_F	$I_F=20mA$	—	—	1.5	V
Reverse Current	I_R	$V_R=5V$	—	—	10	μA
Peak Wavelength	λ_p	$I_F=10mA$		940		nm
Dark Current	I_D	$V_{CE}=10V$	—	—	2	μA
C-E Saturation Voltage	$V_{CE(sat)}$	$I_C=0.25mA$ $I_F=20mA$	—	—	0.4	V
Light Current	I_L	$V_{CE}=5V$ $I_F=20mA$	0.5	5	—	mA
Rise Time	T_r	$I_C=0.8mA$	—	5	—	μsec
Fall Time	T_f	$V_{CC}=30v$ $R_L=1K\Omega$	—	5	—	μsec

● BILL OF MATERIAL

1.	Housing	Class-Fiber Polyamide, UL 94-0
2..	Base	Class-Fiber Polyamide, UL 94-0
3.	Ball	Glass
4.	Infrared Emitting Diodes	
5.	Silicon Photo Transistors	
6.	Inside part	Copper Alloy, Nickel Plated



SENSOR SWITCH

Item.#	VBS04 Series	Description	VIBRATION SWITCH	Version	V97.0
Page	5 of 7		Date	Sep. 30, 2008	

● Typical Electrical / Optical Characteristics Curves (Ta=25°C)

Fig.1 Power Dissipation vs. Ambient Temperature

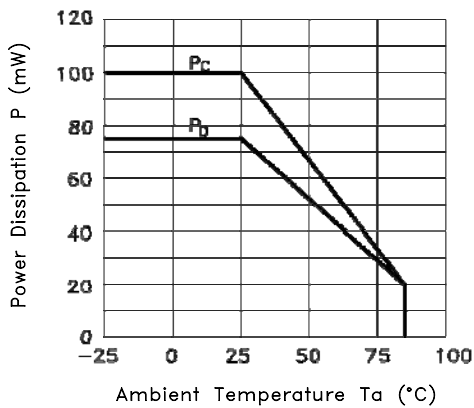


Fig.2 Forward Current vs. Forward Voltage



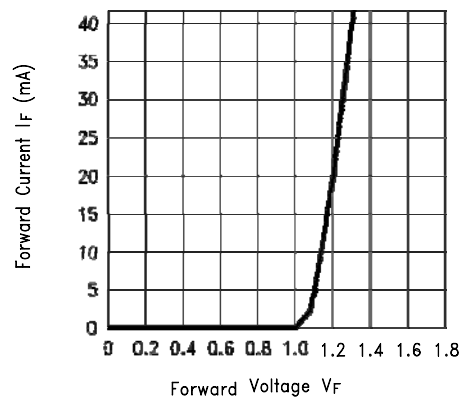


Fig.3 Collector Current vs. Collector-emitter Voltage



Collector Current vs. Ambient Temperature

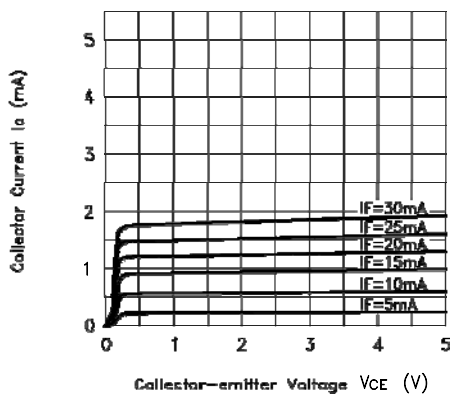

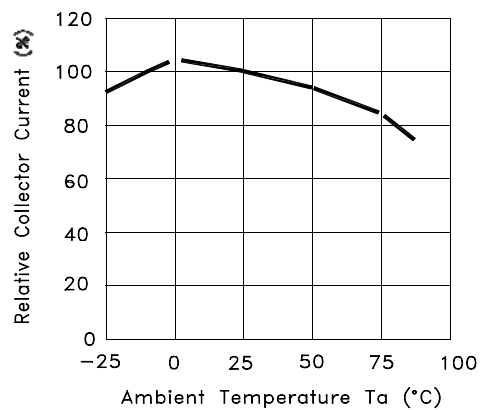

SENSOR SWITCH

Item.#	VBS04 Series	Description	VIBRATION SWITCH	Version	V97.0
Page	6 of 7		Date	Sep. 30, 2008	

Fig.1 Power Dissipation vs. Ambient Temperature

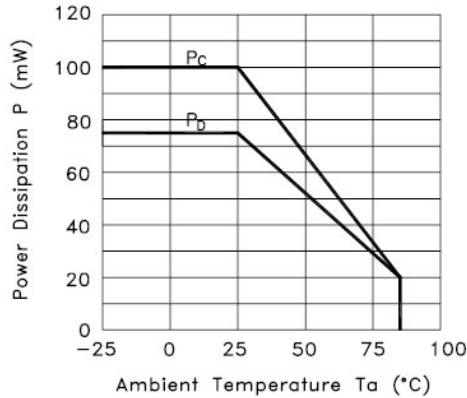


Fig.2 Forward Current vs. Forward Voltage

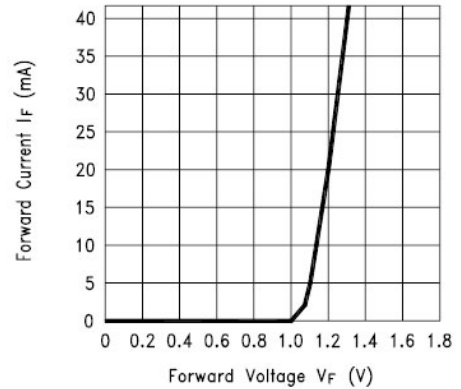


Fig.3 Collector Current vs. Collector-emitter Voltage


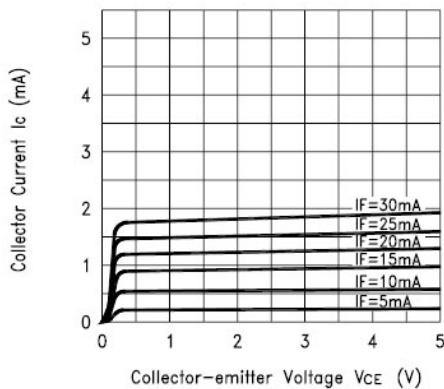


Fig.4 Collector Current vs. Ambient Temperature



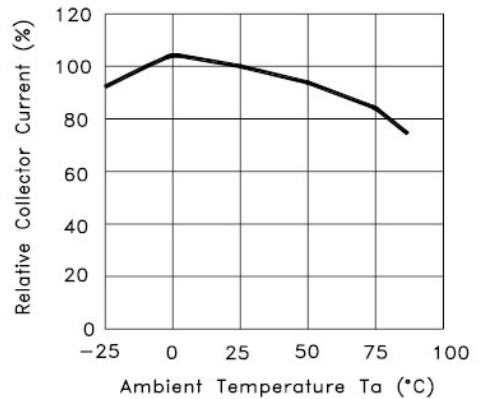

SENSOR SWITCH

Item.#	VBS04 Series	Description	VIBRATION SWITCH	Version	V97.0
Page	7 of 7		Date	Sep. 30, 2008	

● PACKAGE

	Part Number	Package	Quantity	Total	Size
1.	VBS040100	PE Bag	250 pcs	250 pcs	12.7 x 17.8 (cm)
		Inner Box	8 Bags	2,000 pcs	36 x 20 x 9 (cm)
		Carton	3 Boxes	6,000 pcs	36 x 28 x 23 (cm)
2.	VBS040100	IC tube	48 pcs	48 pcs	52.5 x 1 x 1.75 (cm)
		Inner Box	84 tubes	4,032 pcs	54 x 13 x 13 (cm)
		Carton	4 Boxes	16,128 pcs	55 x 29 x 29 (cm)

* Minimum Order Quantity: One Bag / One Box (84 tubes)

● NOTE

1. For the continued product improvement as one of the company policy, specifications may change or update without notice. The latest information can be obtained through our sales offices. Normally, all products are supplied under our standard conditions.

● PRECAUTIONS FOR USE

1. The product is used mainly in electronic devices such as automotive devices, visual devices, home electrical appliances, information devices and communication settings. If the products is intended to be used for other endurance equipments requiring higher safety and reliability such as life support system, space and aviations devices, disaster and safety system, it's necessary to make verification of conformity or contact us for the details before using.
2. Don't try to clean the switch with a solvent or similar substance after the soldering process.
3. The switch might be damaged if using the water-soluble flux.
4. Don't use the switch in the environment with high humidity or other bedewing possibility, as it may cause leaking among the terminals.

d., Taipei, Taiwan, R. O. C.

FAX: 886-2-27310902

..ttp:// www.jinzon.com.tw/