

Extended Drop Float - RSF20

crydom

The RSF20 is designed to eliminate the problems associated with limescale build up around the pivot point on a conventional float switch.

This particular series is primarily for applications where a low level condition has to be monitored, in a system where the liquid is usually maintained at a high level, or where a wider differential is required between the opening and closing levels.

The extended drop float actuator allows the switch housing and float pivots to be located above the surface of the liquid, while the excess buoyancy of the float chamber itself ensures that it remains buoyant, even when scale builds up on the float chamber. Typical applications include wall kettles and hot vending machines.

The switch action is closed when the level is low (float down), and opens as the liquid level rises.


TECHNICAL SPECIFICATIONS		RSF26
Material		Polyphenylene Sulphide (PPS)
Colour		Grey
Temp. Range	°C	-10/ +120*
	°F	+14 / +248*
Min. Fluid S.G.		0.75
Must Close Level (S.G.=1)		140mm
Must Open Level (S.G.=1)		110mm

* Maximum temperature requires ETFE cable to be specified.

ELECTRICAL SPECIFICATIONS	
Contact Form	N/C
VA Rating Max.	25
Switching Voltage AC Max.	240
Switching Voltage DC Max.	120
Switching Current Max. A	0.6

All ratings are for resistive load only

Crydom no.	Material	Leadouts	Gaskets
RSF24Y100RF	Polypropylene	1.0m PVC 16/0.2 UL approved	Nitrile
RSF26Y100RF	PPS	1.0m PVC 16/0.2 UL approved	Nitrile
RSF26Y050TG	PPS	50cms ETFE 19/0.2	Viton

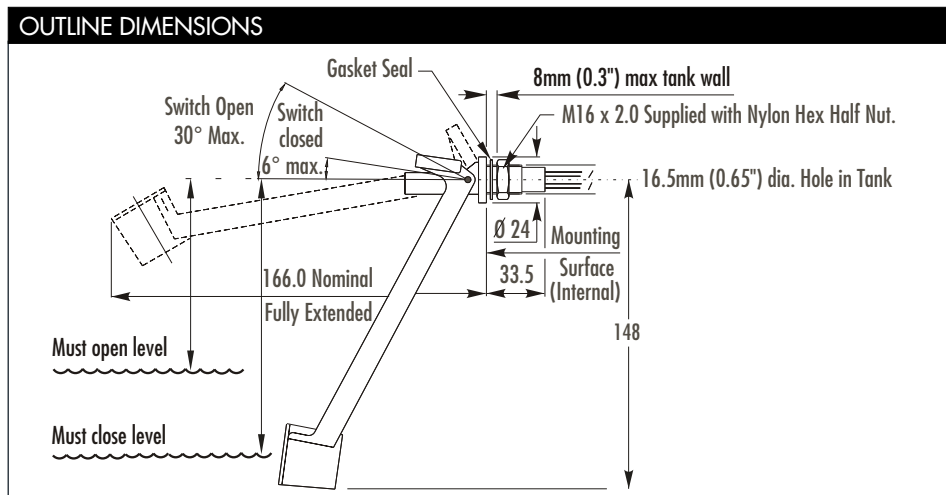

- Low level switch position
- Hot/boiling water
- High buoyancy float
- WRAS approved for use in hot and cold water
- Many variants are UL recognised components. File number E171218

Crydom Magnetics Ltd
 7 Cobham Road
 Ferndown Industrial Estate
 Wimborne
 Dorset BH21 7PE
 Tel: +44 (0) 1202 897969
 Fax: +44 (0) 1202 891918
 magnetics@crydom.com
 www.crydom.co.uk