

JIN ZON ENTERPRISE CO., LTD.

4F-3, No. 171, Sec. 2, Chang An E. Rd.,
Taipei, Taiwan, R. O. C.

TEL: 886-2-27111093~5


FAX: 886-2-27310902

E-mail: jinzon@ms2.hinet.net

Http:// www.jinzon.com.tw/

Reed switch ZW-211

This product is in accordance with RoHs

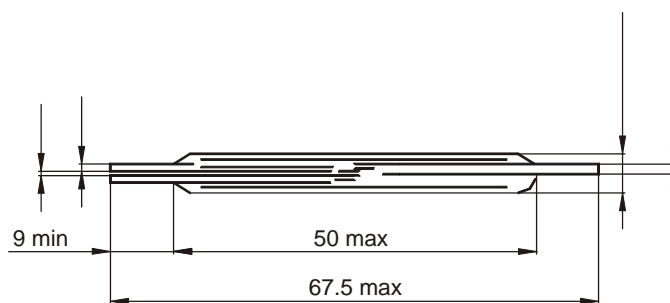

all dimensions in mm

PARAMETERS	Unit	TYPE
		ZW-211
Contact form		transfer type (type C)
Switching power max	W,VA	20
Switching current max	A	0.5
Carry current max	A	2
Switching voltage max	V _{DC}	200
Pull-in Ampere turns	AT	50 ÷ 120
Contact resistance max	mΩ	150
Operate time incl. bounce time max	ms	3
Release time max	ms	0.5
Breakdown voltage min	V _{DC}	400
Capacitance max	pF	4
Insulation resistance min	Ω	10 ⁹
Environment category acc. to IEC 68-1		55/100/10
Operating life tested with resistive loads Load 24 V _{DC} , 200 mA		1x10 ⁶ operations
Test coil - No. of turns - Dimensions - Resistance	mm Ω	CP-11 10000 φ 0.09 φ 7.6 x 50 850 acc. Polish Standard PN-75/T-04400