

UTR3


Ultrasonic Transmitter / Receiver

General description

The UTR3 is an hybrid circuit that allows to realize an ultrasonic detector adding few external components.

Detection is based on amplitude variation of received ultrasonic signal (40KHz) due to the movement of an object.

It shows stable electric characteristics thanks to the "Thick film hybrid" technology.

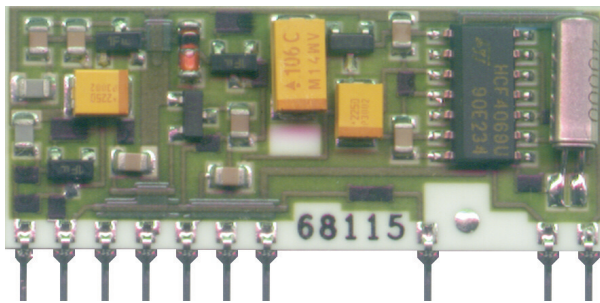


Features

- AC Input Amplifier with Automatic Gain Control

Applications

- Car Alarm systems
- Residential and commercial security systems
- Automatic doors opening systems

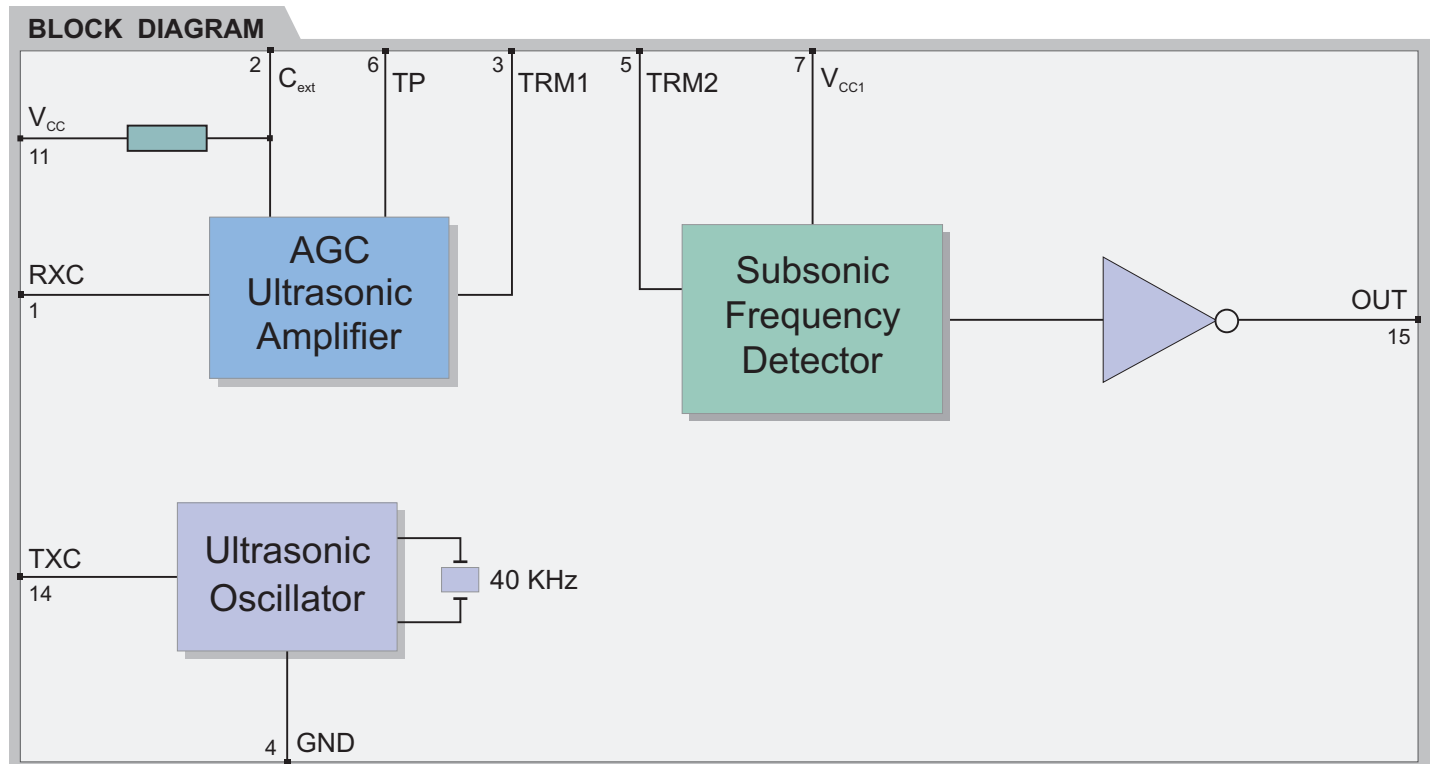

Electrical Characteristics


Ta = 25°C unless otherwise specified

CHARACTERISTICS		MIN	TYP	MAX	UNIT
V _{CC}	Supply Voltage	9	12	16	VDC
V _{CC1}	Supply Voltage	4.5	5	5.5	VDC
I _S	Supply Current		10		mA
G	Ultrasonic Amplifier Gain		50		dB
F _U	Ultrasonic Frequency	38	40	42	KHz
I _{OL}	Out Sink Current (Vo = 0.4V)	0.5	1		mA
I _{OH}	Out Source Current (Vo = 4.6V)	0.5	1		mA
T _{OP}	Operating Temperature Range	-20		+80	°C


Pin Description

1	RXC	Ultrasonic Piezoceramic Receiver Input (RXCAP)
2	Cext	Supply Voltage External Capacitor
3	TRM1	External Trimmer
4	GND	Ground
5	TRM2	External Trimmer
6	TP	Test Point
7	VCC1	+5V Supply Voltage
11	VCC	+12V Supply Voltage
14	TXC	Ultrasonic Piezoceramic Transmitter Output (TXCAP)
15	OUT	OUT="LOW" if Objet is moving

Mechanical Dimensions

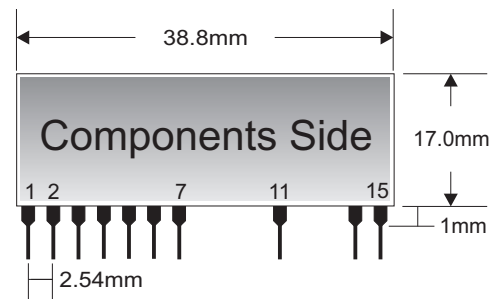

TYPICAL APPLICATION

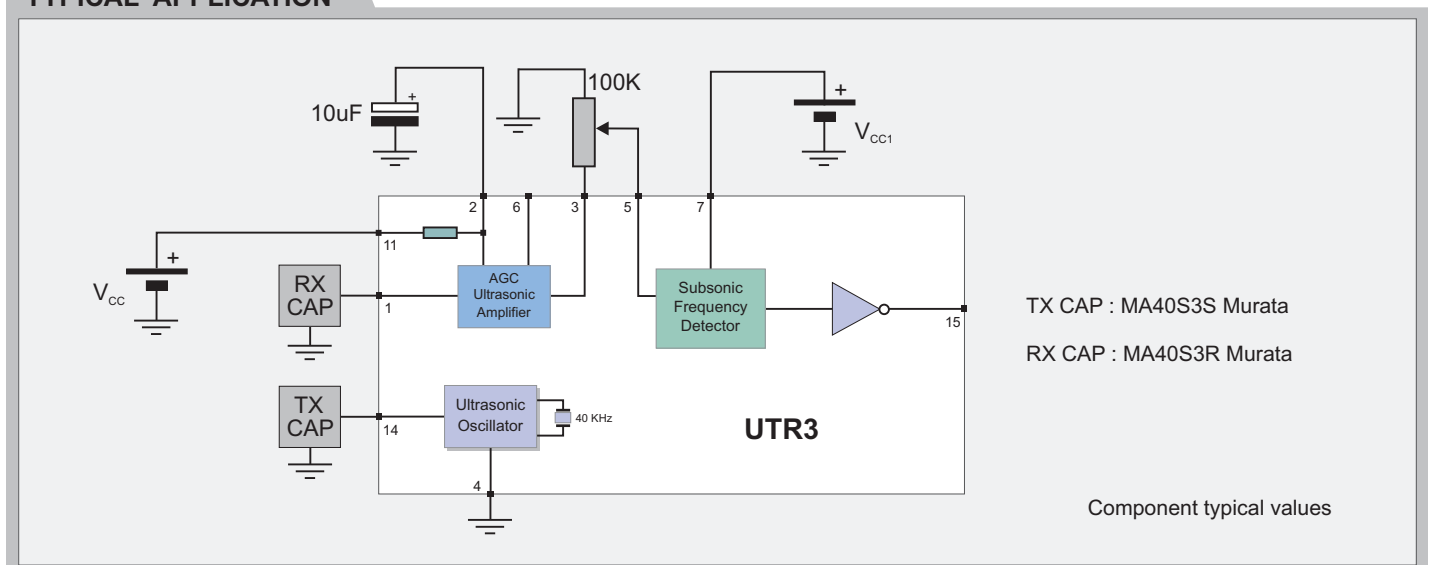

Web Site: www.telecontrolli.com

HEAD OFFICE & PLANT

Via Nazionale delle Puglie, 177
80026 CASORIA (NA), Italy
Tel: +39 081 7599033
Fax: +39 081 7596494

SALES OFFICE

sales @ telecontrolli.com