



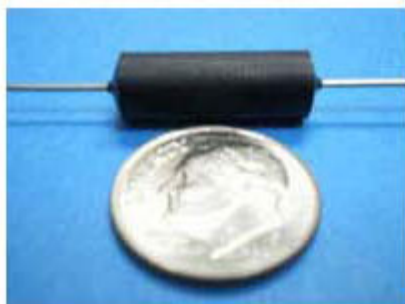

## HR2512N .5W Wire Wound Axial Lead Ultra Precision Resistor

### TYPE HR

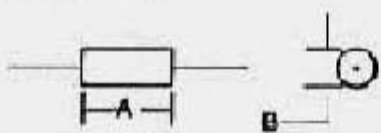

### Electrical & Physical Specifications:

<b>A-Length:</b>	19.05mm (.750")
<b>B-Diameter:</b>	6.35mm (.250")
<b>Lead Dimensions:</b>	.032" D X 1.500" L
<b>Max Watts @ 1% Tol:</b>	.5
<b>Max Volts @ 1% Tol:</b>	300
<b>Temperature Range:</b>	-65°C. to +125°C.
<b>Resistance Range (<math>\Omega</math>):</b>	.1 to 1M $\Omega$ (MEG)

### HR Series Engineering Attributes:

#### RESISTANCE & TOLERANCES

You can select any Ohmic value or decimal part of an Ohm with tolerances to  $\pm 0.05\%$ . 10 $\Omega$  minimum resistance for  $\pm 0.1\%$  tolerance. See figure #2 shown below.

#### TCR CHARACTERISTIC

##### Standard:

100 $\Omega$  & higher values:  $0 \pm 5$  ppm/°C.

For values below 100 $\Omega$ :  $0 \pm 15$  ppm/°C.

##### Special:

100 $\Omega$  & higher:  $0 \pm 1$  ppm/°C. matching to  $0 \pm 5$  ppm/°C.

Please specify temperature span of operation. The TCR is calculated between +25°C. & +100°C.

#### POWER VS. AMBIENT TEMPERATURE

All Ultra Precision Resistors are designed for full load based upon  $\pm 1\%$  resistance tolerance providing the ambient temperature (+) plus the rise in temperature due to self-heating, does not exceed +125°C. Derated to zero power @ +145°C., See figure #1 shown below.

#### STABILITY

To  $\pm 0.001\%/yr.$  @ +25°C. with no Load.

#### REDUCTION OF THERMAL EMF USING COPPER TERMINALS:

Less than  $\pm 3$  microvolts/°C. emitted.

#### INDUCTANCE

Non-inductive balanced reverse pi windings are standard for the HR series with the exception of the HR103.

#### PROTECTIVE SEAL

Features a stress free base coat as well as an epoxy casing that is resistant to solder heat & solvents.

#### MARKING

PRC stamp, part type & name,  $\Omega$  value & tolerance, physical size permitting.

### Type HR Derating Table\*

For  $\pm 1\%$  resistance tolerance apply up to 100% of rated power to +125 Degrees Celsius. derated to zero @ +145 Degrees Celsius.

For  $\pm 1/2\%$  resistance tolerance apply up to 75% of rated power to +125 Degrees Celsius. derated to zero @ +140 Degrees Celsius.

For  $\pm 1/4\%$  resistance tolerance apply up to 50% of rated power to +125 Degrees Celsius. derated to zero @ +135 Degrees Celsius.


For  $\pm 0.1\%$  resistance tolerance apply up to 50% of rated power to +125 Degrees Celsius. derated

to zero @ +135 Degrees Celsius.


For  $\pm 0.05\%$  resistance tolerance apply up to 35% of rated power to +125 Degrees Celsius. derated to zero @ +132 Degrees Celsius.

\* Percent of Rated Power vs. Combined Temp. of Self-Heating and Ambient (in °C.).

## Detailed Images

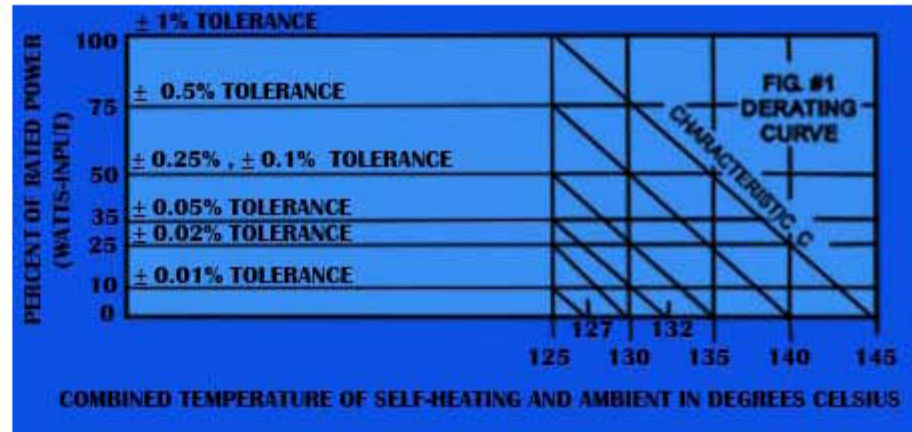

## Derating Information

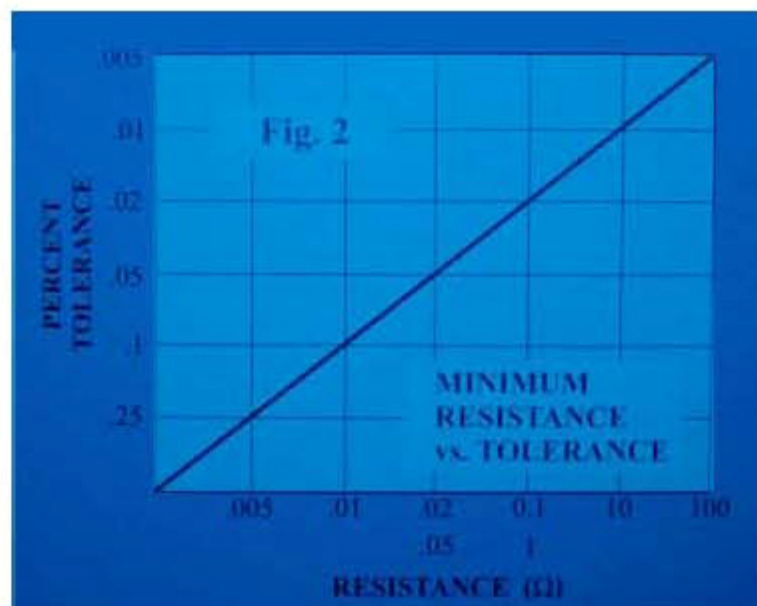

## Minimum Resistance vs. Tolerance

### Details

SKU	HR2512N
Type	Axial
Length	19.05mm (.750")
Lead Dimensions	.032" dia. X 1.500" long
Diameter	6.35mm (.250")
TCR Char.	0±5ppm (Std.) to 0±1ppm /°C.
Temperature	-65°C. to +125°C.
Resistance	.1Ω to 1MΩ
Tolerance	±.01% (std.) Ranging from ±1% to ±.005%
Stability	to ±.001% per year
Max Watts	.5
Max Volts	300
Lead Free	Yes